





The first Ironing Station specifically designed for the heavy duty needs of commercial change rooms.









Iron Maiden. ııl ııl ıll Щ Щ **TOP VIEW SIDE VIEW FRONT VIEW** 1200mm (3'11") 1300mm(4'3") (AISLE CLEARANCE) 400mm 450mm (1' 6")

2100mm (6'11")

1200mm (3'11")

Five At Heart

TIMER

SWITCH

POWER-

POINT

EMERGENCY TOWEL

Laminated MDF door (AUS: E0 MR) (with extensive colour range) White particleboard carcass (AUS: E1 MR) Moisture resistant base with black finish Steel ironing board

Specification


Material

(Z) Bulk head or 30 degree slope top (Optional)

Iron included

2x Ironing board covers

Powerpoint and timer switch supplied Electrician needs to install and wire onsite (done by others)

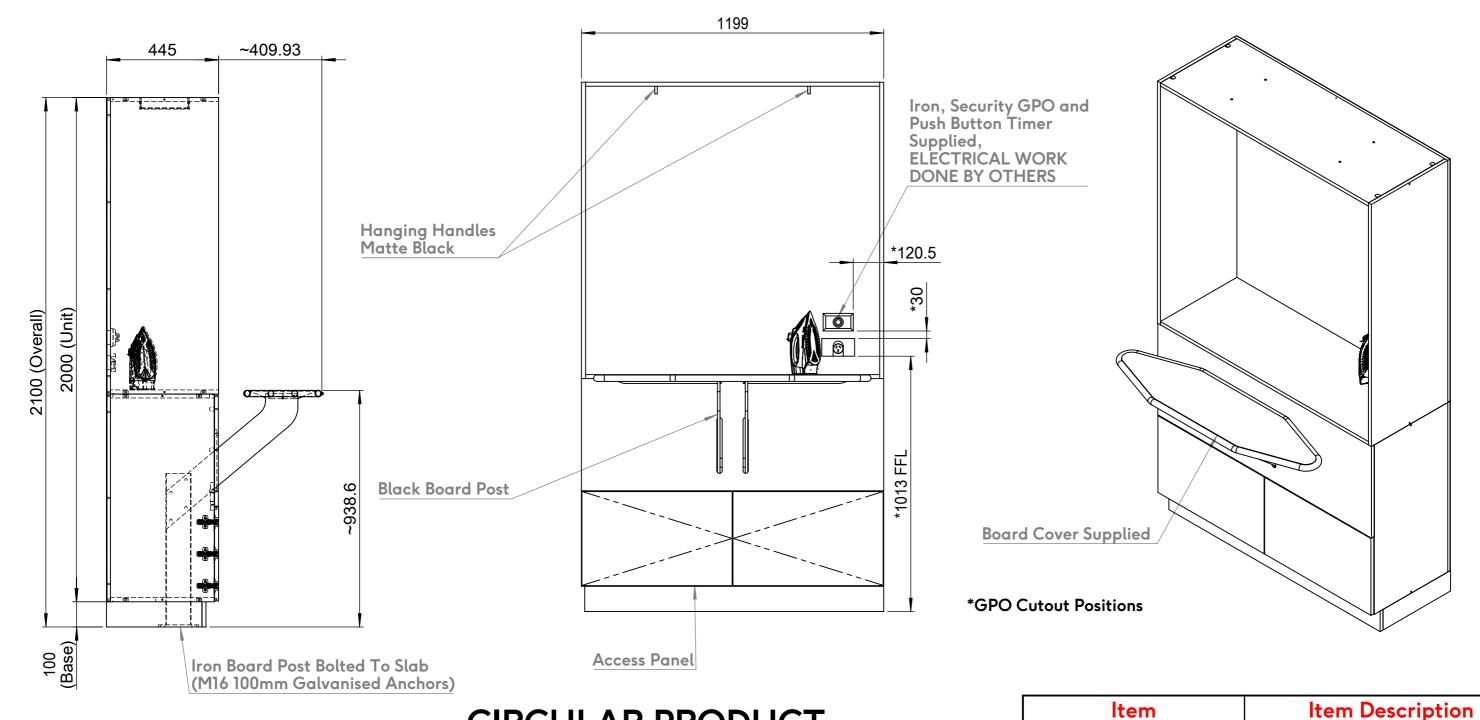

CIRCULAR PRODUCT

DATE:

CARCASS IS PRE-MADE (NO MODIFICATION)
PLEASE CONFIRM COLOUR

REV: DWN: CHK: DESCR:

	Hanging Handles	Matte Black				
	Iron	Phillips GC3929/64				
	Door & Panel Colour					
7	Carcass	16mm White MR Particleboard				
7	Base Front Colour					
\exists	Door Edging	1 mm ABS Matching				
4	Carcass Edging	1 mm ABS Black				

ive 🖊 📗		N 4 • 1		
\t\\\	Iron	Maid	len	Full
léart	••••			•

leart			aia	
Pro	iect			SHEET 1 of 1
P - '		-DWG-	REV 1	SCALE: 1:15

Iron Maiden (Trim)



Material

Laminated MDF door (AUS: E0 MR) (with extensive colour range)

White particleboard carcass (AUS: E1 MR)

Moisture resistant base with black finish

Steel ironing board

Specification


Iron included


2x Ironing board covers


Powerpoint and timer switch supplied Electrician needs to install and wire onsite (done by others) **TOP VIEW**

SIDE VIEW


FRONT VIEW







At Heart

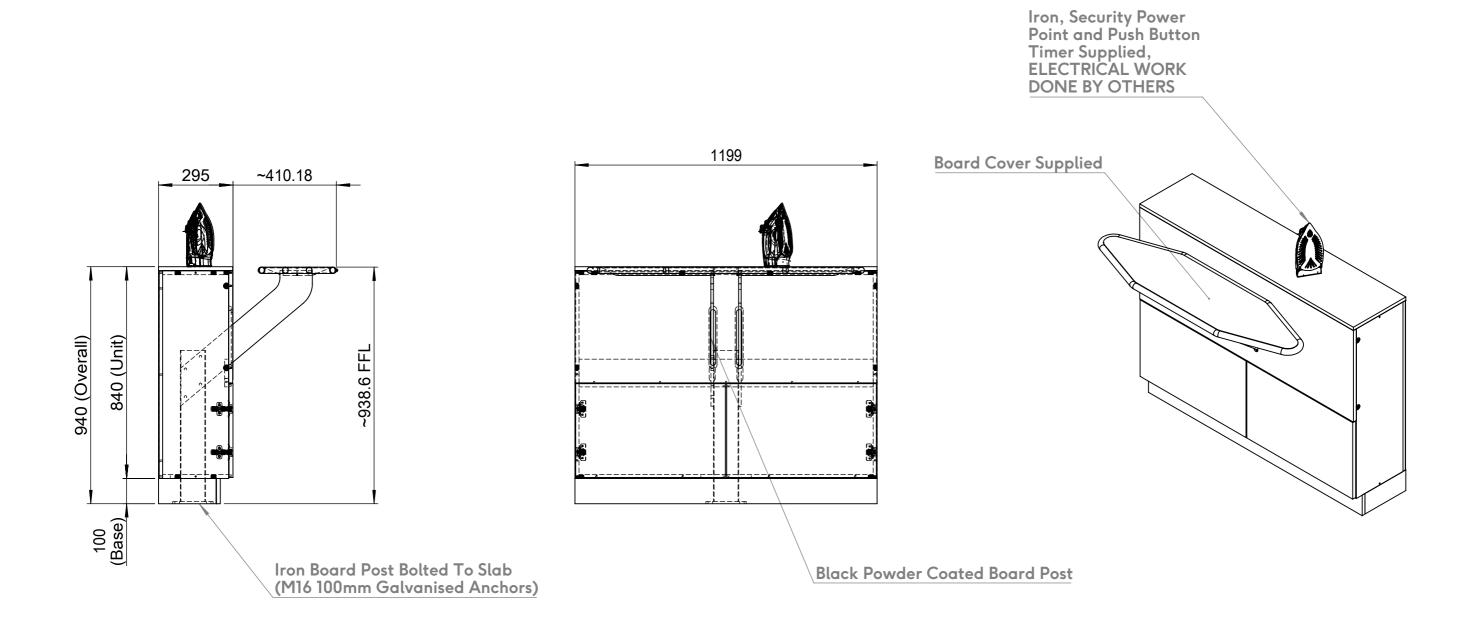

CIRCULAR PRODUCT

				CARCASS IS PRE-MADE (NO MODIFICATION)				· ·	ltem	Item Description
				PLEASE CONFIRM COLOUR					Iron	Phillips GC3929/64
									Door & Panel Colour	
Five /		• •	- .	DATE:	REV:	DWN:	CHK:	DESCR:	Locker Carcass	16mm White MR Particleboard
At Heart	ron Mo	aide	n Trim						Base Front Colour	
Proje	ct:		SHEET 1 of 1						Door Edging	1 mm ABS Matching
P-	-DWG-	REV 1	SCALE: 1:15						Carcass Edging	1 mm ABS Black

Ironing Station Warranty and Technical Data

Warranty Information

Five At Heart's Iron Maiden comes with a standard 7 year warranty, effective from the hand over date.

For the warranty period, we warrant that the equipment (and any materials) we supply will comply with the relevant standards at the date of installation.

This warranty is limited and may be excluded in part or in full in light of user damage or failure to install to Five At Heart specification.

We recommend a monthly visual inspection for signs of damage or need for cleaning.

Contact Five At Heart in the event of product damage. Iron subject to manufacturer warranty.

Disclaime

Iron Maiden

Images may differ from actual product and specifications may change without prior notice. Five At Heart is not liable for the structural integrity of the substrate and any queries should be directed through the project engineer.

AUS, UK, CAN: manufactured to metric dimensions.

USA: manufactured to imperial dimensions.

Fixing options and details for Ironing board

Fig 1 M16/95mm (25/64" x 3 47/64") galvanised sleeve anchor

Substrate requirements

- Concrete -160mm (6 19/64") thick and in good condition

Power Requirements

Standard AC power supply required for powerpoint and 10 minute timer switch. Cut outs in joinery and hardware supplied (Powerpoint and timer switch). An electrician will need to install and wire onsite (done by others)

Fig 2 shows the rough in detail for powerpoint and timer switch.

Installation Requirements

Lockers/auxiliary units require a minimum of 16mm (5/8") at the end of each nib wall for filler panels and 50mm (2") for corner fillers.

Base plate and fixing nuts must be sealed to the substrate using Sikaflex Pro+ Polyurethane Sealant or euivalent.

Maintenance Requirements

If any moving parts appear to be malfunctioning, discontinue use and contact Five At Heart.



CAUTION:

Iron will be hot during operation and for a period of time after operation.




Fig 1 M16/95mm (25/64" x 3 47/64") galvanised sleeve anchor




Fig 2 Electrical rough in details

Cleaning

For general care and maint nance, simply w pe away most spills or marks with a damp cloth, or wipe clean with non abrasive household cleaner. Do not submerge product at any point.

Avoid scourers and abrasives as they will damage the surface.

Do not use waxes or polishing products as they dull the natural shine. Con-

tact Five At Heart for replacement ironing board covers.



Creating spaces for however you Roll...

fiveatheart.com

Australia North America Europe 1300 769 332 or au_info@fiveatheart.com 1888 218 3433 or na_info@fiveatheart.com (+44) 20313 71966 or eu_info@fiveatheart.com

