

Virgil.



Spec Sheet

Five
At
Heart

Official Patent and Design Numbers (either pending or granted)
Australian patent no. 2018903591

Fender friendly vertical parking that holds the tyre, rather than abusing your rims.



Single Level.

Material

Mild Steel with aluminium lock bar
Standard powder coat finish black and yellow (custom colours available, minimum order 20)

Specification

(X) Centre Spacing

AUS Standard (2890.3)	700mm (2'4")
Manufacturer Recommended	600mm (2')

(Z) Bike & Rack




AUS Standard (2890.3)	1200mm (3'11")
Manufacturer Recommended	1100mm (3'7")



TOP VIEW

SIDE VIEW

FRONT VIEW

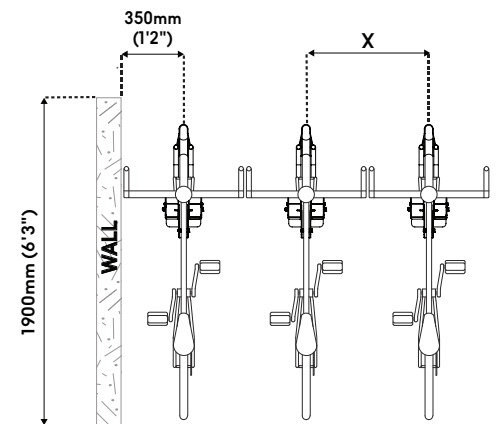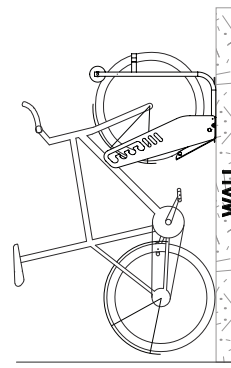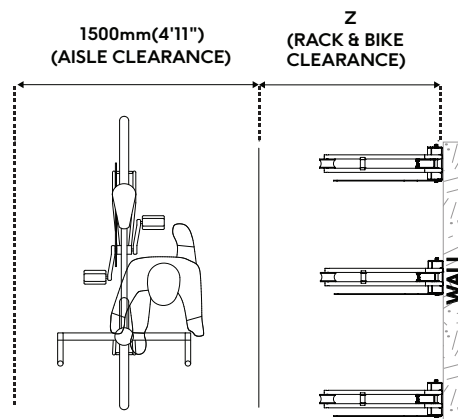

Staggered.




Material

Mild Steel with aluminium lock bar
Standard powder coat finish black and yellow (custom colours available, minimum order 20)
The stagger is created by having virgil along the bottom level and then Cradle along the higher level


Specification

(X) Centre Spacing	
AUS Standard (2890.3)	500mm (1'8")
Manufacturer Recommended	400mm (1'4")
Portland (OR) Standard	600mm (2') or 450mm (1'6") with approval
San Francisco (CA) Standard	400mm (1'4")
(Z) Bike & Rack	
AUS Standard (2890.3)	1200mm (3'11")
Manufacturer Recommended	1100mm (3'7")


TOP VIEW

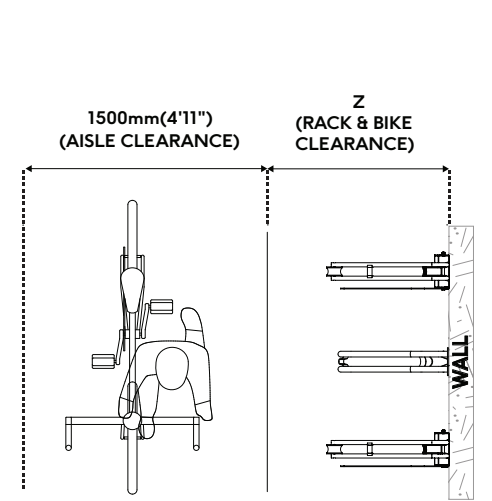

SIDE VIEW

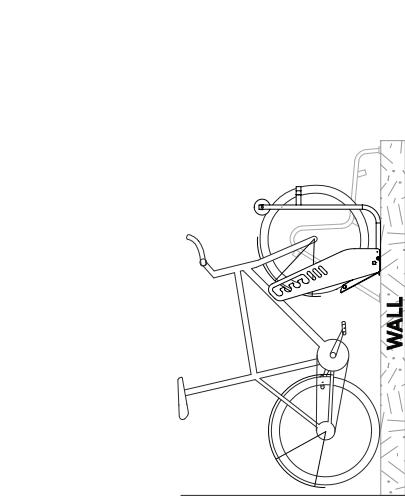

FRONT VIEW

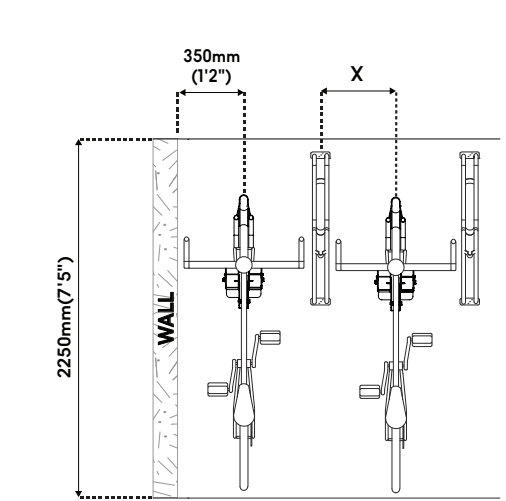

Virgil Warranty and Technical Data

Warranty Information

Five At Heart's Virgil comes with a standard 5 year warranty, effective from the hand over date.

For the warranty period, we warrant that the equipment (and any materials) we supply will comply with the relevant standards at the date of installation.

This warranty is limited and may be excluded in part or in full in light of user damage or failure to install to Five At Heart specification. Usage is reliant on following the guidelines. If the guidelines are not followed Five At Heart accept no responsibility for damage to property.

We recommend a monthly visual inspection for signs of damage or need for cleaning.

Contact Five At Heart in the event of product damage.

Disclaimer

Images may differ from actual product and specifications may change without prior notice. Five At Heart is not liable for the structural integrity of the substrate and any queries should be directed to the project engineer.

Product is manufactured to metric dimensions.

Fixing options / and details

- Fig 1** Into Concrete Wall – M10/50mm (1 15/16") zinc plated sleeve anchor
Fig 2 Into Masonry Block work – Bugle screw and ram plug
Fig 3 Into Timber Nogging – Bugle screw
Fig 4 Into Steel Framing – 22mm (7/8") 14 gauge metal tek screw

Product Weight

15kg

Substrate Requirements

- Concrete – 100mm (3 15/16") thick and in good condition
- Cinder block
- Timber nogging
- Steel framing
- Timber floor - Mounting into a timber floor requires solid 70mm (2 3/4") timber for anything with an 150mm (5 7/8") base.

(any other surface must be approved by Five At Heart design team)

Maintenance Requirements

If any moving parts appear to be malfunctioning, discontinue use and contact Five At Heart.

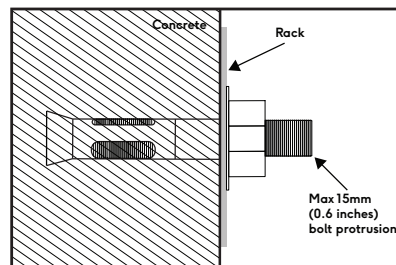


Fig 1/ Concrete Wall

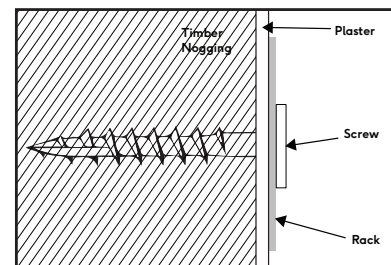


Fig 3/ Timber Nogging

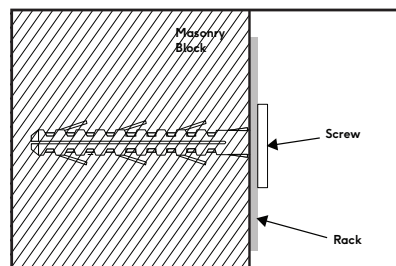


Fig 2/ Masonry Block

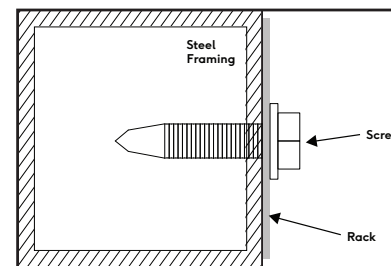


Fig 4/ Steel Framing

Cleaning

Cleaning should start at the time the products are installed, ensuring that construction materials such as concrete, plaster and paint splashes are removed before they have a chance to dry. Failure to remove these materials will require aggressive cleaning in the future, that may be harmful to the products. Wipe with a damp cloth for surface cleaning. Regular cleaning may be done with a solution of warm water and a non-abrasive, pH neutral detergent solution. Surfaces should be thoroughly rinsed after cleaning to remove all residues.

WARNING: DO NOT UNDER ANY CIRCUMSTANCES USE STRONG SOLVENTS SUCH AS THINNERS OR SOLUTIONS CONTAINING CHLORINATED HYDROCARBONS, ESTERS OR KETONES. ABRASIVE CLEANERS OR CUTTING COMPOUNDS SHOULD NOT BE USED.

Five At Heart



Creating
spaces
for however
you Roll...



fiveatheart.com

Australia

North America

Europe

(+61) 1300 769 332 or au_info@fiveatheart.com

(+1) 888 218 3433 or na_info@fiveatheart.com

+44 (0)20 3137 1966 or eu_info@fiveatheart.com