


The McFly.



Spec Sheet

Five
At
Heart

**When you
absolutely positively
need to pump those
tyres.**

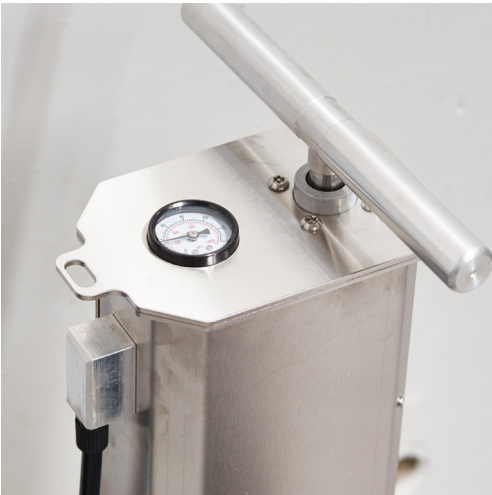

**Five
At
Heart**

The logo for "Five At Heart" features the brand name in a bold, black, sans-serif font. To the right of the text is a stylized graphic of a bicycle wheel with a black rim and five red spokes.

The McFly.

Material

Stainless steel

Product Performance

Manual pump action.

Wheel support that holds the bike independently, freeing hands to pump tyres.

Pump handles are ergonomically designed for comfort and to keep hands clear of the unit.

The pressure gauge lets users view and inflate tyres to the correct pressure.


Schrader & Presta valve compatible.

A slot keeps the pump stored off the floor, preventing damage and keeping it tidy.


Recommend pairing with a repair stand (Sold Separately).




TOP VIEW

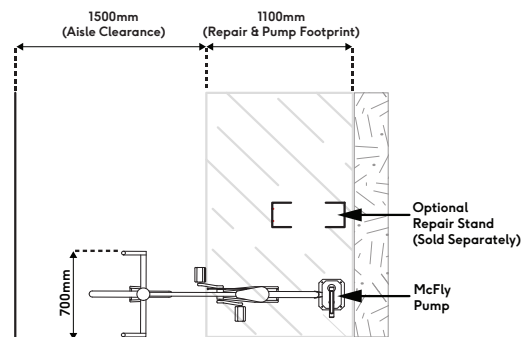

SIDE VIEW

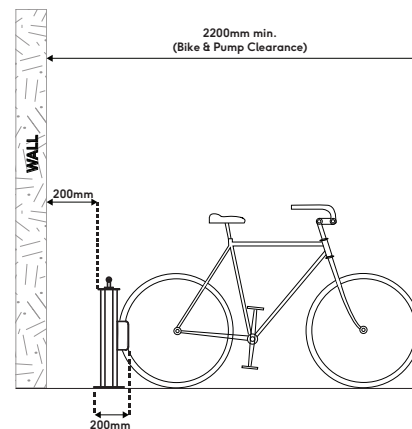

FRONT VIEW

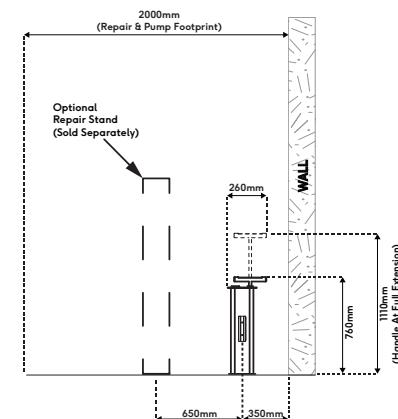

McFly Warranty and Technical Data

Warranty Information

Five At Heart products come with a standard 5 year warranty, effective from the handover date.

For the Warranty period, we warrant that the equipment (and any materials) we supply will comply with the relevant standards at the date of installation. This warranty is limited and may be excluded in part or in full in light of user damage or failure to install to Five At Heart specification.

We recommend a monthly visual inspection for signs of damage or need for cleaning.

Contact Five At Heart in the event of product damage.

Disclaimer

Images may differ from actual product and specifications may change without prior notice. Five At Heart is not liable for the structural integrity of the substrate and any queries should be directed through the project engineer.

Product is manufactured to metric dimensions.

Product Weight

5kg

Fixing options / and details

Fig 1 M10/50mm (1 15/16") zinc plated sleeve anchor

Substrate requirements

- Concrete – 100mm (3 15/16") thick and in good condition

Maintenance Requirements

If any moving parts appear to be malfunctioning, discontinue use and contact Five At Heart.

Cleaning

Cleaning should start at the time the products are installed, ensuring that construction materials such as concrete, plaster and paint splashes are removed before they have a chance to dry. Failure to remove these materials will require aggressive cleaning in the future, that may be harmful to the products.

Wipe with a damp cloth for surface cleaning. Regular cleaning may be done with a solution of warm water and a non-abrasive, pH neutral detergent solution. Surfaces should be thoroughly rinsed after cleaning to remove all residues.

WARNING: DO NOT UNDER ANY CIRCUMSTANCES USE STRONG SOLVENTS SUCH AS THINNERS OR SOLUTIONS CONTAINING CHLORINATED HYDROCARBONS, ESTERS OR KETONES. ABRASIVE CLEANERS OR CUTTING COMPOUNDS SHOULD NOT BE USED.

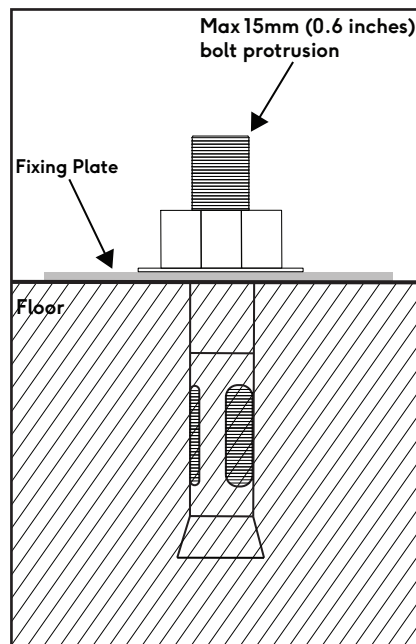


Fig 1 M10/50mm (3/8" x 3") galvanised sleeve anchor

Five At Heart



Creating
spaces
for however
you Roll...

fiveatheart.com

Australia

UK/Europe

North America

1300 769 332 or au_info@fiveatheart.com

+44 (0) 020 3137 1966 or eu_info@fiveatheart.com

(+1) 888 218 3433 or na_info@fiveatheart.com

