

Accessible Locker.



Spec Sheet



Official Patent and Design Numbers (either pending or granted)
Australian design no. 201915827

Easy to use for everyone.



**Five
At
Heart**

Accessible Locker.

Product Performance

916mm hanging height ensures garments have enough space to hang properly.

A full-width hanging rail allows multiple garments to hang comfortably.

The accessible section of the lockers is 1250mm high for optimal wheelchair accessibility.

A higher (250mm), recessed (150mm) base better accommodates wheelchair users, allowing them to easily roll up to the locker.

The sliding doors prevent wheelchair users from having to roll back and forth to open and close the locker.

Four additional smaller lockers above for able-bodied users.

Material

Laminated MDF door (AUS: E0 MR)
(with extensive colour range)

White particleboard carcass (AUS: E1 MR)

Moisture resistant base with black finish

Specification

Black Handles as standard.
(Specify your preferred handle and we will price it accordingly, subject to local availability).


Front Door Vents (Optional)

Choice of locking system
(Sliding doors **only** available with **key lock**)


Bulkheads available at additional cost




TOP VIEW

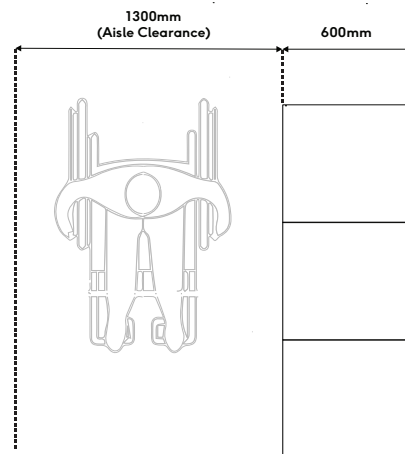

SIDE VIEW

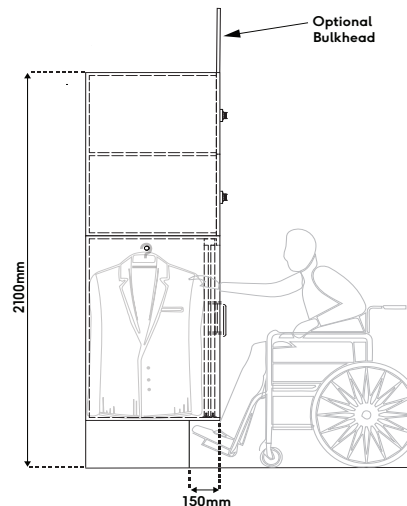

FRONT VIEW

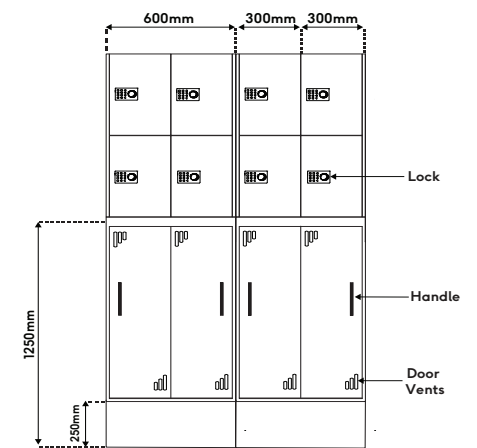

Accessible locker Warranty and Technical Data

Warranty Information

Five At Heart's Accessible Locker comes with a standard 7 year warranty, effective from the handover date.

For the warranty period, we warrant that the equipment (and any materials) we supply will comply with the relevant standards at the date of installation.

This warranty is limited and may be excluded in part or in full in light of user damage or failure to install to Five At Heart specification.

We recommend a monthly visual inspection for signs of damage or need for cleaning.

Contact Five At Heart in the event of product damage.

Disclaimer

Images may differ from actual product and specifications may change without prior notice.

Manufactured to metric dimensions.

Installation Requirements

AUS: Lockers/auxiliary units require a minimum of 16mm at the end of each nib wall for filler panels and 50mm for corner fillers.

UK/Europe: Lockers/auxiliary units require a minimum of 25mm at the end of each nib wall for filler panels and 50mm for corner fillers.

Maintenance Requirements

If any moving parts appear to be malfunctioning, discontinue use and contact Five At Heart.

Cleaning

For general care and maintenance, simply wipe away most spills or marks with a damp cloth, or wipe clean with non abrasive household cleaner.

Do not submerge product at any point.

Avoid scourers and abrasives as they will damage the surface.

Do not use waxes or polishing products as they dull the natural shine.

Five At Heart



Creating
spaces
for however
you Roll...

fiveatheart.com

Australia
UK/Europe

(+61) 1300 769 332 or au_info@fiveatheart.com
+44 (0)20 3137 1966 or eu_info@fiveatheart.com

