


The Arc.



Spec Sheet

Five
At
Heart

High density storage that protects your bike and your back.

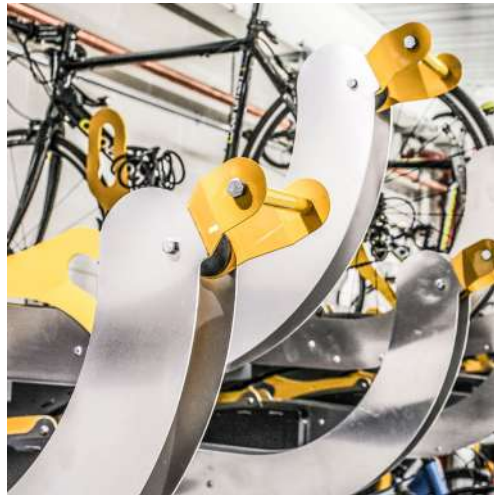

**Five
At
Heart**

Single Sided Staggered.

Product Performance

A counterweighted top tier ensures smooth, balanced movement for easy bike loading.

Lightweight components make the top rack easier to move and lift.

A movable lock bar improves access and lets users secure the frame and wheel with a D-lock.

Material

Mild steel base with powder coated black hammertone finish.

Mill finish aluminium carriage.

Lock bars, handle and lower wheel catcher supplied in satin black powder coat as standard (custom colours available at additional cost & availability).

Specification

(X) Aisle

AUS Standard (2890.3)	2000mm
Manufacturer Minimum Requirement	2000mm

(Y) Centre Spacing

AUS Standard (2890.3)	400mm
Manufacturer Minimum Requirement	400mm

(Z) Ceiling Height Minimum




AUS Standard (2890.3)	2700mm
Manufacturer Minimum Requirement	2600mm



TOP VIEW

SIDE VIEW

FRONT VIEW

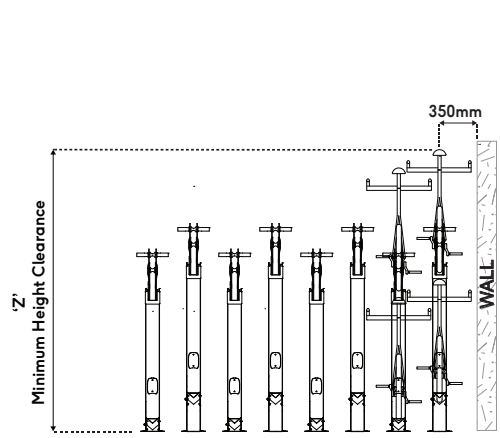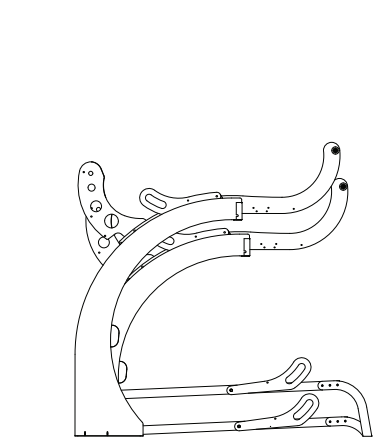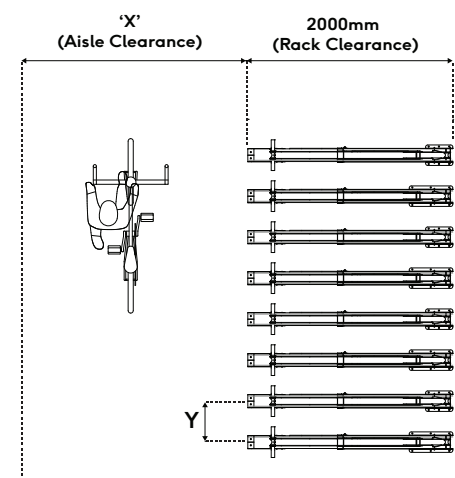

Single Sided Non-Staggered.

Product Performance

A counterweighted top tier ensures smooth, balanced movement for easy bike loading.

Lightweight components make the top rack easier to move and lift.

A movable lock bar improves access and lets users secure the frame and wheel with a D-lock.

Material

Mild steel base with powder coated black hammertone finish.

Mill finish aluminium carriage.

Lock bars, handle and lower wheel catcher supplied in satin black powder coat as standard (custom colours available at additional cost & availability).

Specification

(X) Aisle

AUS Standard (2890.3)	2000mm
Manufacturer Minimum Requirement	2000mm

(Z) Ceiling Height Minimum

Manufacturer Minimum Requirement	2400mm
----------------------------------	--------

(Y) Centre Spacing




AUS Standard (2890.3)	700mm
Manufacturer Minimum Requirement	600mm



TOP VIEW

SIDE VIEW

FRONT VIEW

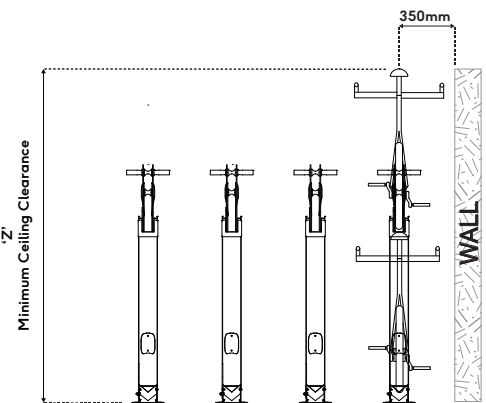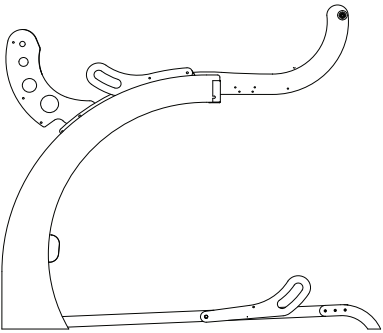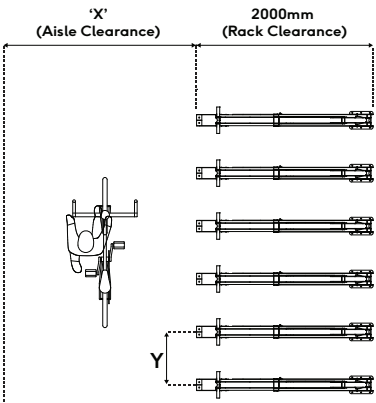

Double Sided Staggered.

Product Performance

A counterweighted top tier ensures smooth, balanced movement for easy bike loading.

Lightweight components make the top rack easier to move and lift.

A movable lock bar improves access and lets users secure the frame and wheel with a D-lock.

Material

Mild steel base with powder coated black hammertone finish.

Mill finish aluminium carriage.

Lock bars, handle and lower wheel catcher supplied in satin black powder coat as standard (custom colours available at additional cost & availability).

Specification

(X) Aisle

AUS Standard (2890.3)	2000mm
Manufacturer Minimum Requirement	2000mm

(Y) Centre Spacing


AUS Standard (2890.3)	400mm
Manufacturer Minimum Requirement	400mm

(Z) Ceiling Height Minimum


AUS Standard (2890.3)	2700mm
Manufacturer Minimum Requirement	2600mm




TOP VIEW

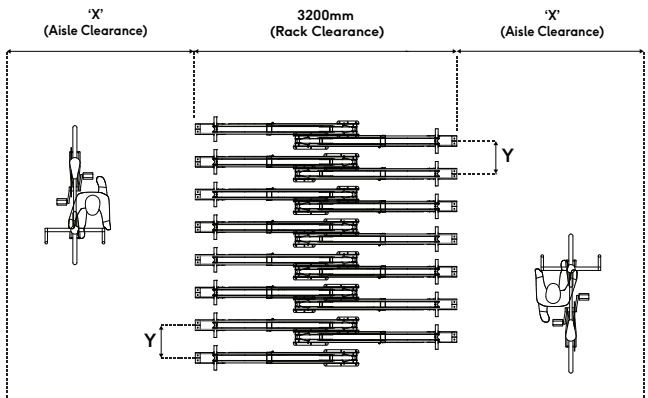

SIDE VIEW

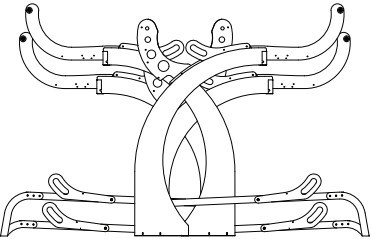

FRONT VIEW

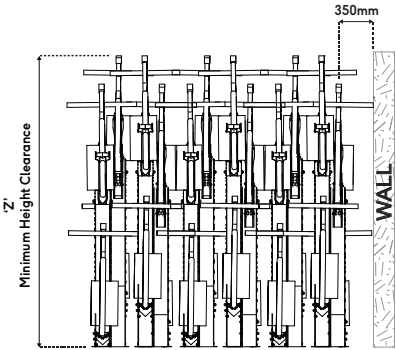

Arc Warranty and Technical Data

Warranty Information

Five At Heart's Arc comes with a standard 5 year warranty, effective from the hand over date.

For the warranty period, we warrant that the equipment (and any materials) we supply will comply with the relevant standards at the date of installation.

This warranty is limited and may be excluded in part or in full in light of user damage or failure to install to Five At Heart specification.

We recommend a monthly visual inspection for signs of damage or need for cleaning.

Contact Five At Heart in the event of product damage.

Disclaimer

Images may differ from actual product and specifications may change without prior notice. Five At Heart is not liable for the structural integrity of the substrate and any queries should be directed through the project engineer.

Product is manufactured to metric dimensions.

Product Weight

Low – 46kg
High – 53kg

Powder Coat Options

Fig 1 Parts marked in purple shows extent of coloured powder coat. (custom colours available at additional cost & subject to availability).

Fixing options / and detail

Fig 2 M10x75mm (3/8"x3") sleeve anchor (dynabolt)

Fig 3 Arc Rail System for screeded or suspended floors.

The support rails are manufactured from 60mm x 30mm x 3mm rectangular hollow section (RHS) steel. Each rail is securely anchored to the floor using resin-fixed threaded rods positioned at **both ends** and at the **centre** of the rail (position subject to rack quantities and site conditions) to provide a stable and robust fixing arrangement.

The Arc units are subsequently fixed to the support rails using Easydrive flange self drilling stitching screws with washers (6.3mm x 25mm). By distributing the Arc units across the continuous support rails, the load is effectively spread along the rail system, significantly reducing the number of direct fixings required into the floor slab while maintaining the structural integrity and stability of the installation.

Please note the Arc Rail System will add 30mm to the required height clearance.

Substrate Requirements

- Concrete – 100mm (3 15/16") thick and in good condition.

Maintenance Requirements

Slide unit bearings are sealed and do not require on going maintenance.


If any moving parts appear to be malfunctioning, discontinue use and contact Five At Heart.

Cleaning

Cleaning should start at the time the products are installed, ensuring that construction materials such as concrete, plaster and paint splashes are removed before they have a chance to dry. Failure to remove these materials will require aggressive cleaning in the future, that may be harmful to the products.

Wipe with a damp cloth for surface cleaning. Regular cleaning may be done with a solution of warm water and a non-abrasive, pH neutral detergent solution. Surfaces should be thoroughly rinsed after cleaning to remove all residues.

WARNING: DO NOT UNDER ANY CIRCUMSTANCES USE STRONG SOLVENTS SUCH AS THINNERS OR SOLUTIONS CONTAINING CHLORINATED HYDROCARBONS, ESTERS OR KETONES. ABRASIVE CLEANERS OR CUTTING COMPOUNDS SHOULD NOT BE USED.

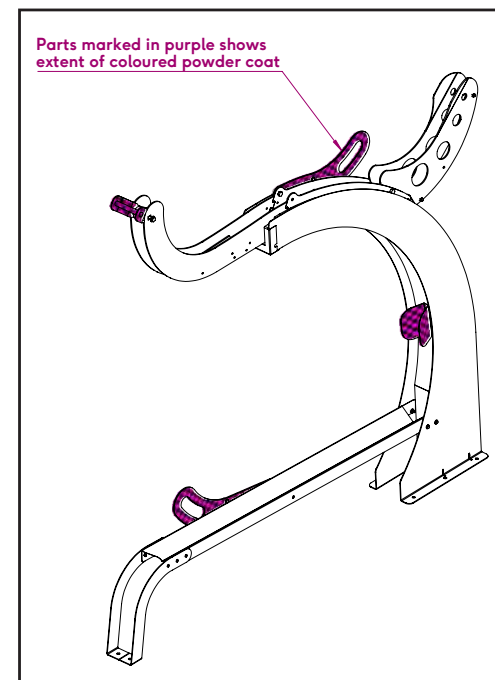

Parts marked in purple shows extent of coloured powder coat

Fig 1 Powder Coat Options

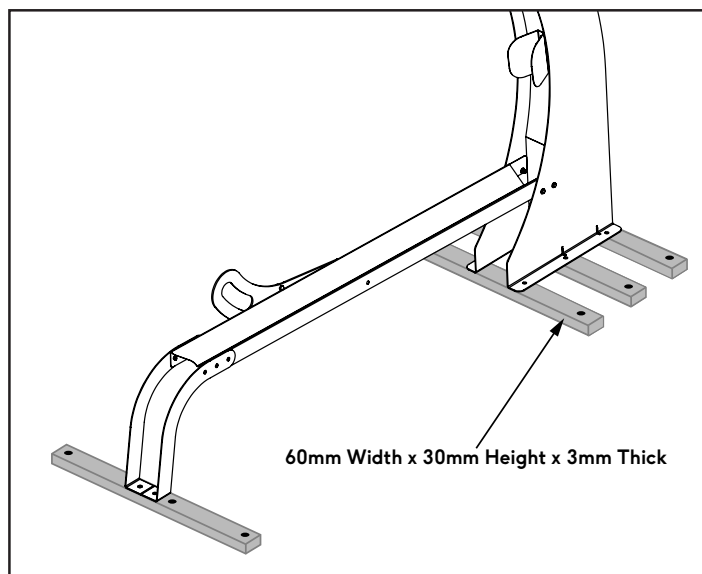


Fig 3 Arc Rail System


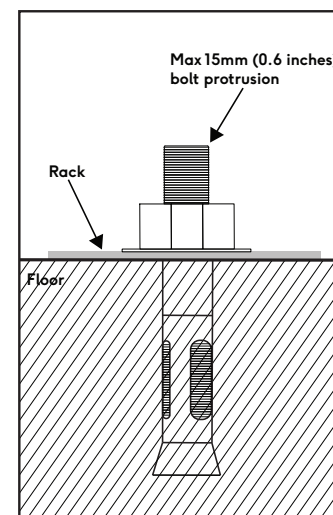


Fig 2 M10x75mm (3/8" x 3") sleeve anchor (dynabolt)

Arc Clearance Map - Path of Travel

The Arc

Five At Heart

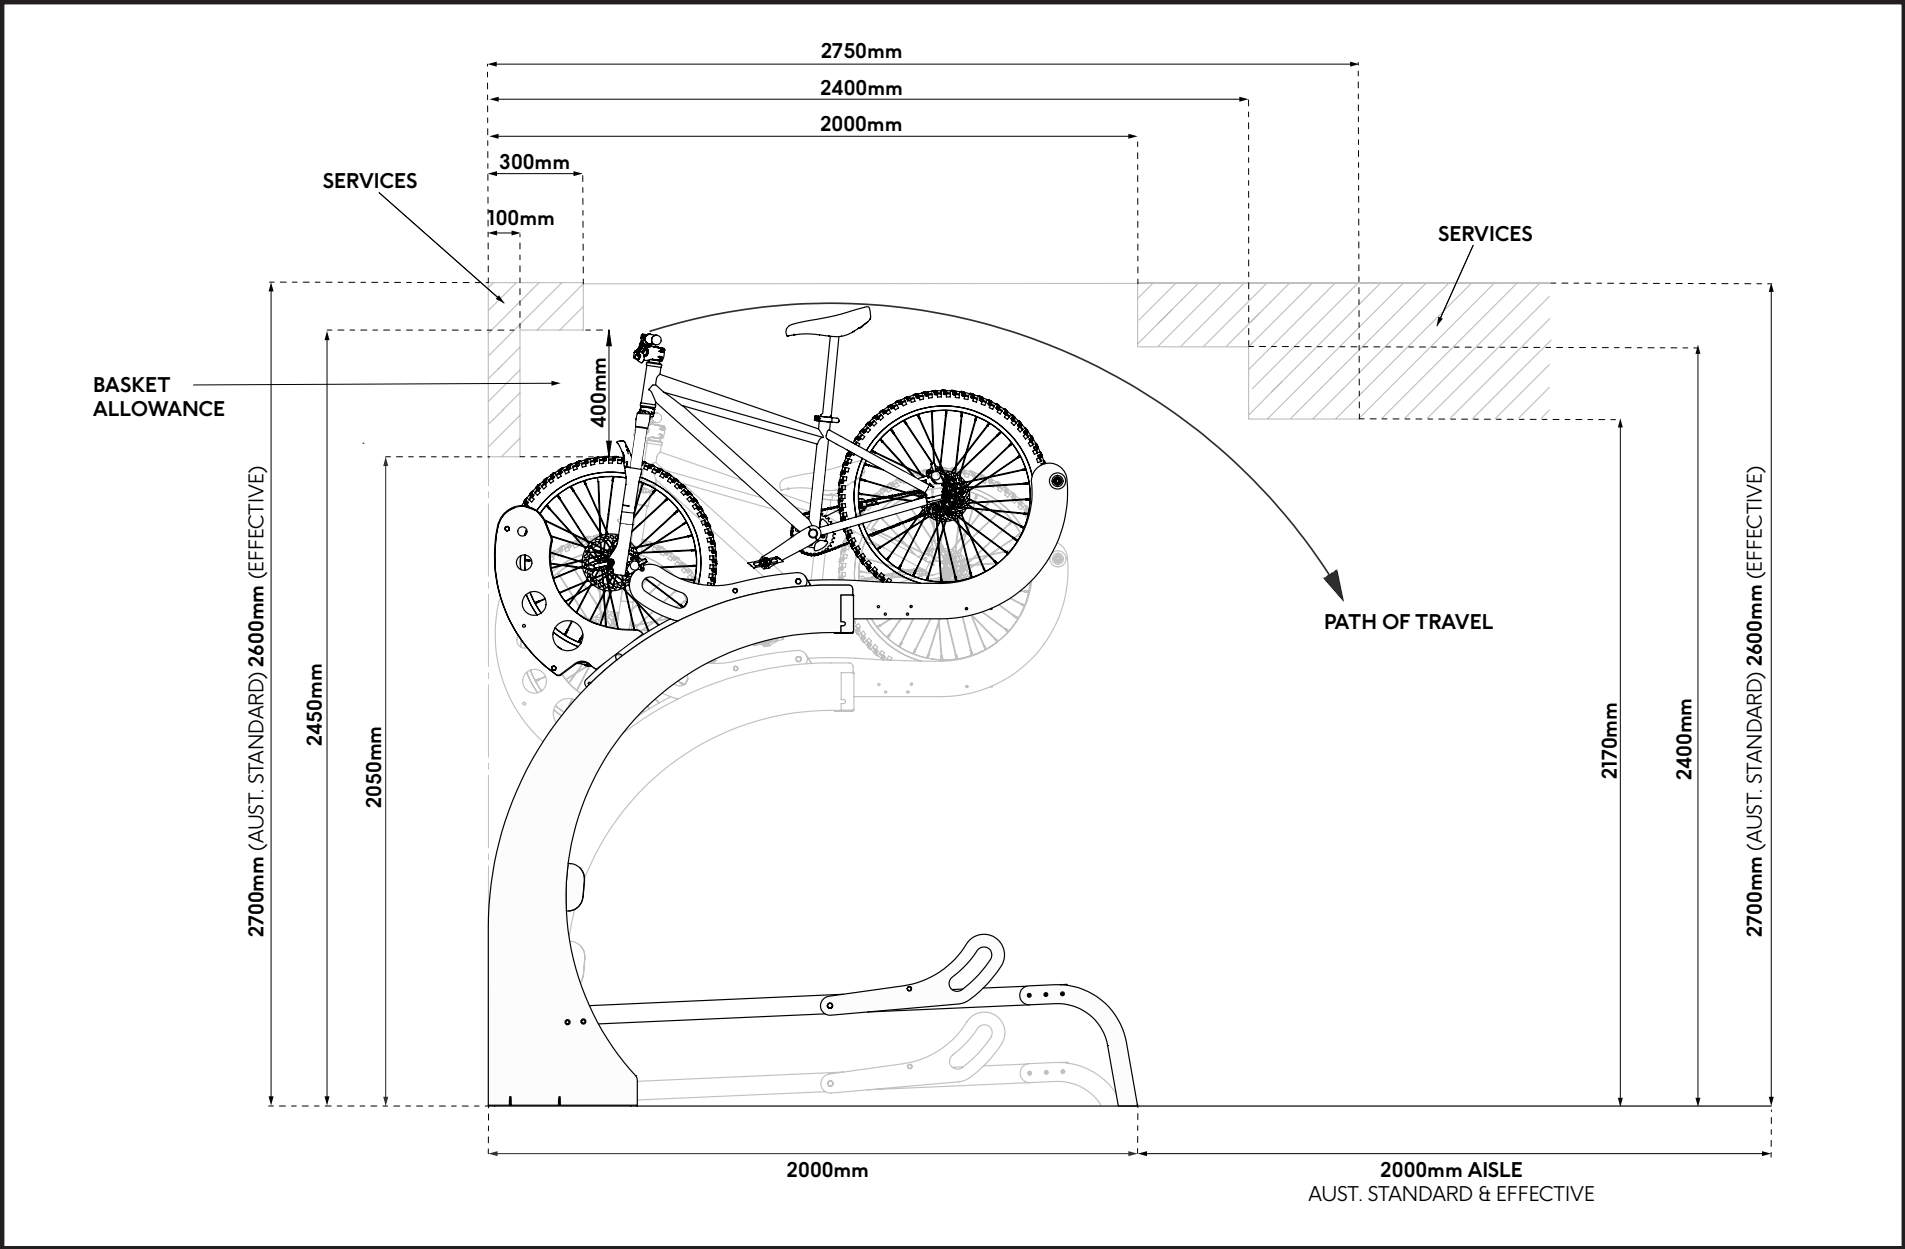

Dimensions based on a 2600mm effective clearance height.

Five At Heart



Creating
spaces
for however
you Roll...



fiveatheart.com

Australia

UK/Europe

North America

(+61) 1300 769 332 or au_info@fiveatheart.com

+44 (0)20 3137 1966 or eu_info@fiveatheart.com

(+1) 888 218 3433 or na_info@fiveatheart.com