

The Cradle.



Spec Sheet

Five
At
Heart

**No more struggling
to lift your bike onto
a hook... easy on both
you and your bike.**




**Five
At
Heart**

Wall Mounted.

Product Performance	
The rack allows the bike to be tipped onto its rear wheel and rolled into place, reducing the effort needed to park it.	
The rack supports the bike only at the tires, preventing rim damage.	
The rack supports D-locks, allowing users to secure both wheels and the frame for safe parking.	
Tire widths between 23mm and 50mm supported.	
Material	
Mild steel with satin black powder coat finish (custom colours available at additional cost & subject to availability).	



Specification	
(X) Centre Spacing	
AUS Standard (2890.3)	500mm
Manufacturer Recommended	400mm
Single Level Option (No Stagger) Requires minimum ceiling of 2000mm	
AUS Standard (2890.3)	700mm
Manufacturer Recommended	600mm
(Z) Bike & Rack	
AUS Standard (2890.3)	1200mm
Manufacturer Recommended	1100mm

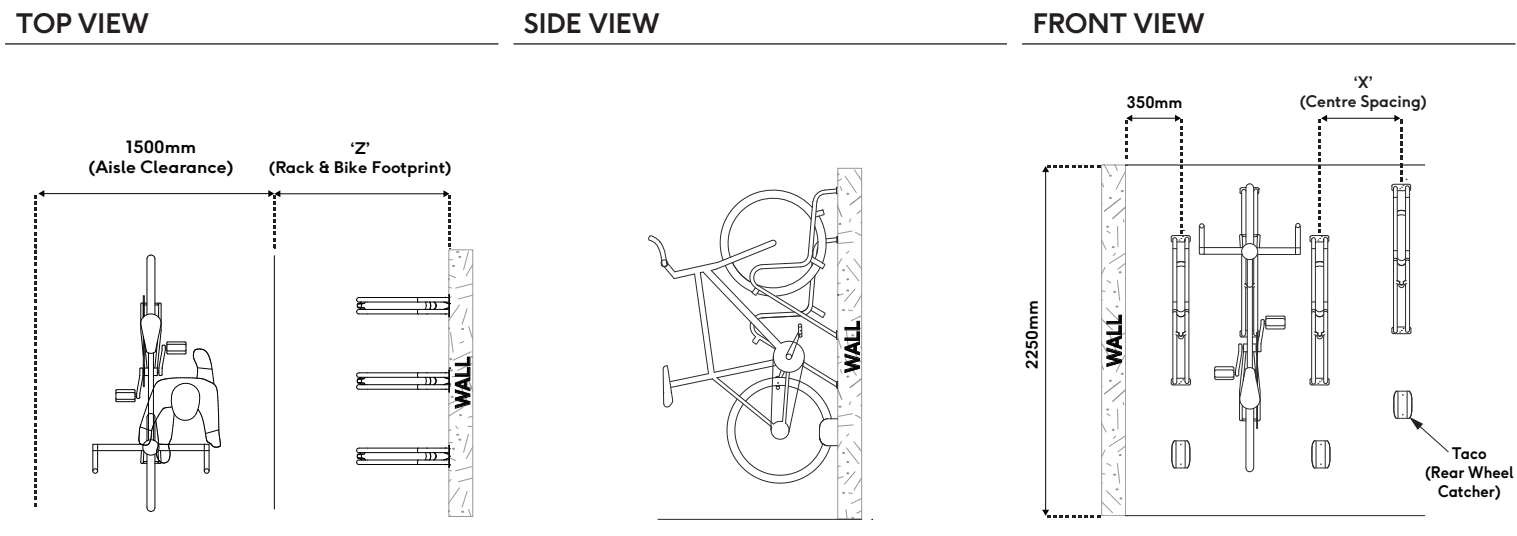

Silver Bullet.



Product Performance

All the features of the Cradle, arranged in a space-saving configuration.

Allows a Cradle to be ground mounted when a suitable wall structure is not available. (Cradle & Post sold separately).

Material


Mild steel with satin black powder coat finish (custom colours available at additional cost & subject to availability).

Specification


(Z) Bike & Rack

AUS Standard (2890.3)	1900mm
Manufacturer Recommended	1700mm


TOP VIEW

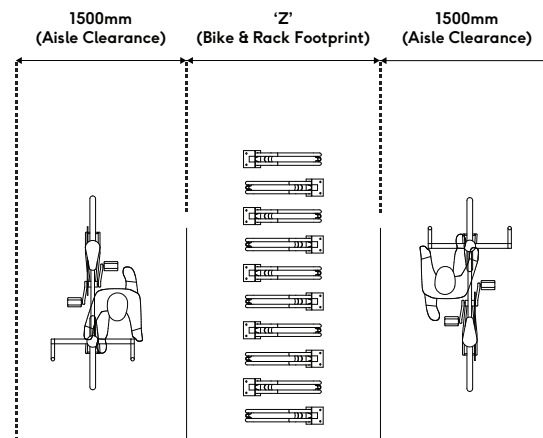

SIDE VIEW

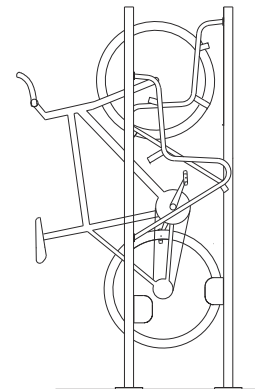

FRONT VIEW

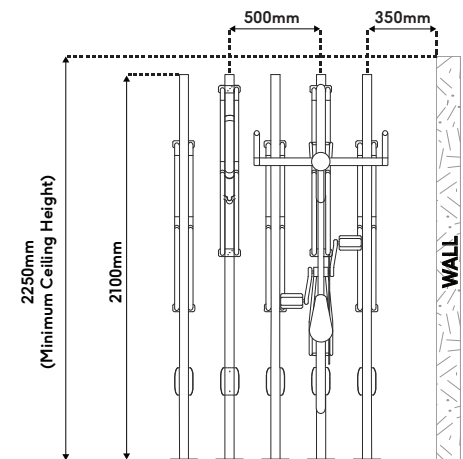

Silver Bullet Post.

(Back to Back)

Product Performance

Includes all the features of the Cradle and allows it to be ground mounted when a suitable wall structure is not available. (Cradle & Post sold separately).

Material


Mild steel with satin black powder coat finish (custom colours available at additional cost & subject to availability).

Specification


(X) Centre Spacing	
AUS Standard (2890.3)	500mm
Manufacturer Recommended	400mm
Single Level Option (No Stagger) Requires minimum ceiling of 2000mm	
AUS Standard (2890.3)	700mm
Manufacturer Recommended	600mm
(Z) Bike & Rack	
AUS Standard (2890.3)	2450mm
Manufacturer Recommended	2250mm




TOP VIEW

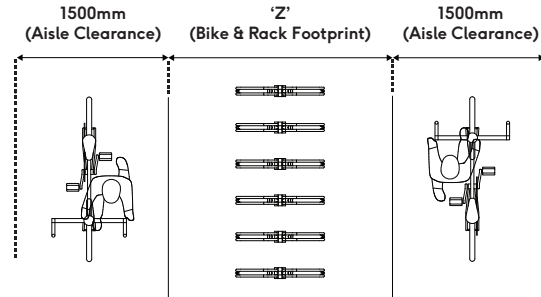

SIDE VIEW

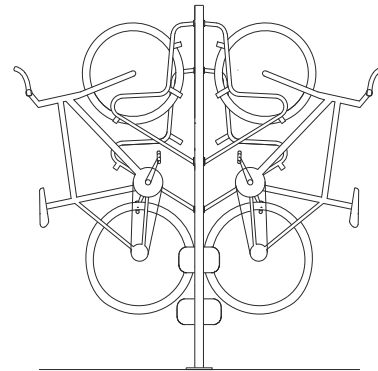

FRONT VIEW

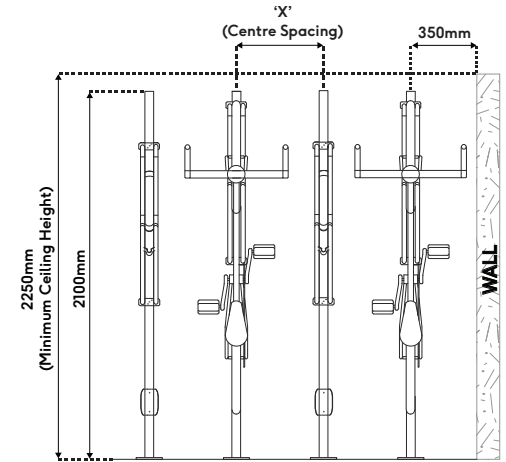

Silver Bullet Post.

(Single)


Product Performance

Includes all the features of the Cradle and allows it to be ground mounted when a suitable wall structure is not available. (Cradle & Post sold separately).


Material

Mild steel with satin black powder coat finish (custom colours available at additional cost & subject to availability).


Specification	
(X) Centre Spacing	
AUS Standard (2890.3)	500mm
Manufacturer Recommended	400mm
Single Level Option (No Stagger) Requires minimum ceiling of 2000mm	
AUS Standard (2890.3)	700mm
Manufacturer Recommended	600mm
(Z) Bike & Rack	
AUS Standard (2890.3)	1325mm
Manufacturer Recommended	1225mm

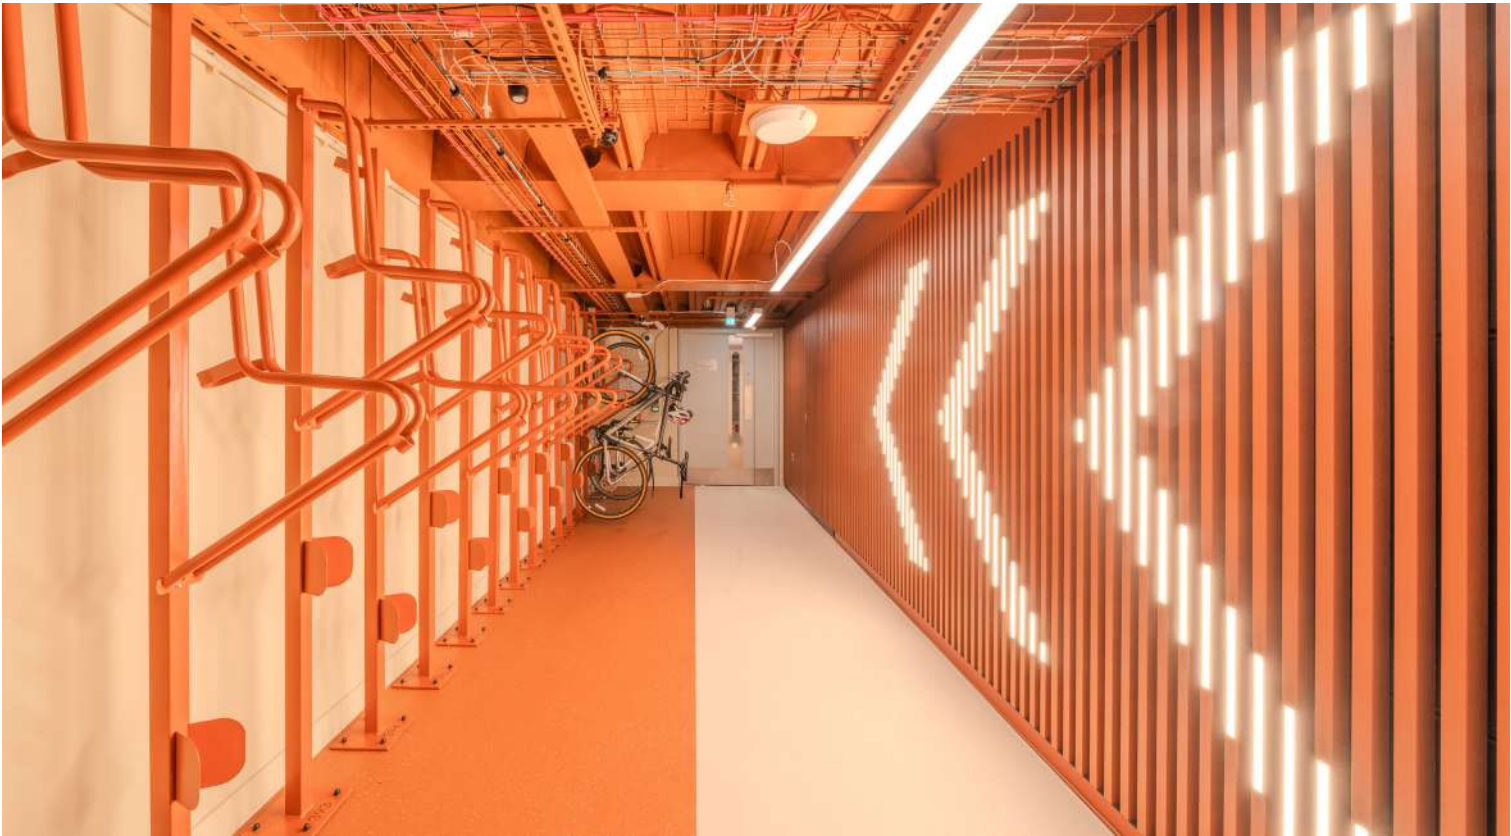


TOP VIEW

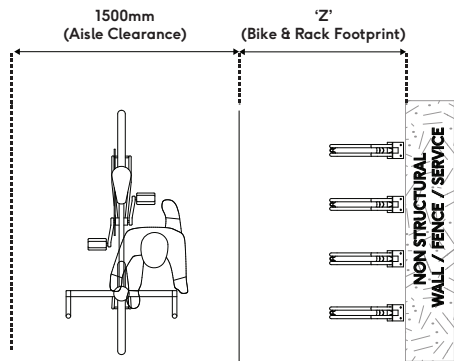

SIDE VIEW

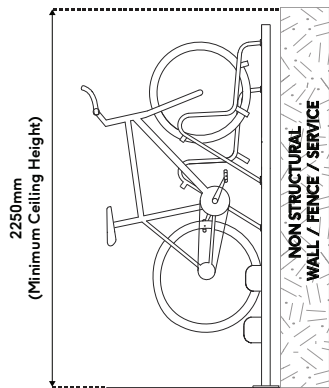

FRONT VIEW

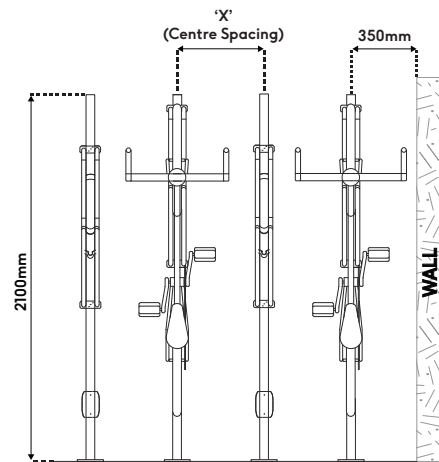

Cradle Warranty and Technical Data

Warranty Information

Five At Heart's Cradle comes with a standard 5 year warranty, effective from the handover date.

For the warranty period, we warrant that the equipment (and any materials) we supply will comply with the relevant standards at the date of installation.

This warranty is limited and may be excluded in part or in full in light of user damage or failure to install to Five At Heart specification.

We recommend a monthly visual inspection for signs of damage or need for cleaning.

Contact Five At Heart in the event of product damage.

Disclaimer

Images may differ from actual product and specifications may change without prior notice. Five At Heart is not liable for the structural integrity of the substrate and any queries should be directed to the project engineer.

Product is manufactured to metric dimensions.

Product Weight

4kg

Cradle fixing options / and details

Fig 1 Into Concrete Wall – M10/50mm (1 15/16") zinc plated sleeve anchor (1 per mounting plate)

Fig 2 Into Masonry Block work – Bugle screw and ram plug (2 per mounting plate)

Fig 3 Into Timber Nogging – Bugle screw (2 per mounting plate)

Fig 4 Into Steel Framing – 22mm (7/8") 14 gauge metal tek screw (2 per mounting plate)

Cradle substrate Requirements

- Concrete – 100mm (3 15/16") thick and in good condition
- Core filled cinder block
- Timber nogging
- Steel framing
- Timber floor - Mounting into a timber floor requires solid 70mm (2 3/4") timber for anything with an 150mm (5 7/8") base.

(any other surface must be approved by Five At Heart design team)

Silver Bullet Post fixing options / and details

Fig 5 Silver Bullet Post into concrete - M10/50mm (1 15/16") zinc plated sleeve anchor

Frame substrate requirements

Concrete for Silver Bullet Post - 100mm (3 15/16") thick and in good condition.

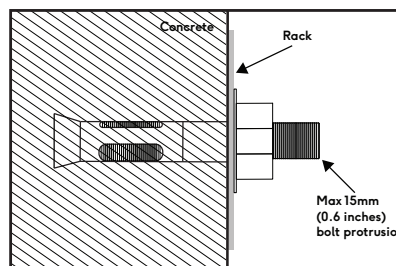


Fig 1/ Concrete Wall

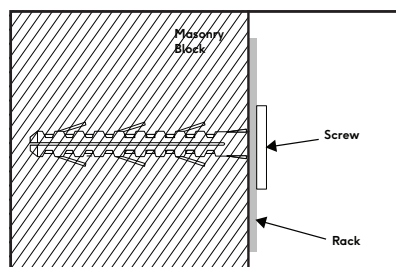


Fig 2/ Masonry Block

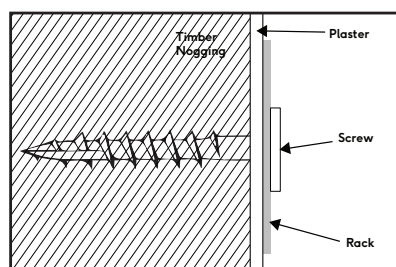


Fig 3/ Timber Nogging

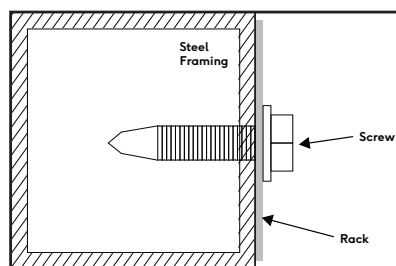


Fig 4/ Steel Framing

Maintenance Requirements

If any moving parts appear to be malfunctioning, discontinue use and contact Five At Heart.

Cleaning

Cleaning should start at the time the products are installed, ensuring that construction materials such as concrete, plaster and paint splashes are removed before they have a chance to dry. Failure to remove these materials will require aggressive cleaning in the future, that may be harmful to the products. Wipe with a damp cloth for surface cleaning. Regular cleaning may be done with a solution of warm water and a non-abrasive, pH neutral detergent solution. Surfaces should be thoroughly rinsed after cleaning to remove all residues.

WARNING: DO NOT UNDER ANY CIRCUMSTANCES USE STRONG SOLVENTS SUCH AS THINNERS OR SOLUTIONS CONTAINING CHLORINATED HYDROCARBONS, ESTERS OR KETONES. ABRASIVE CLEANERS OR CUTTING COMPOUNDS SHOULD NOT BE USED.


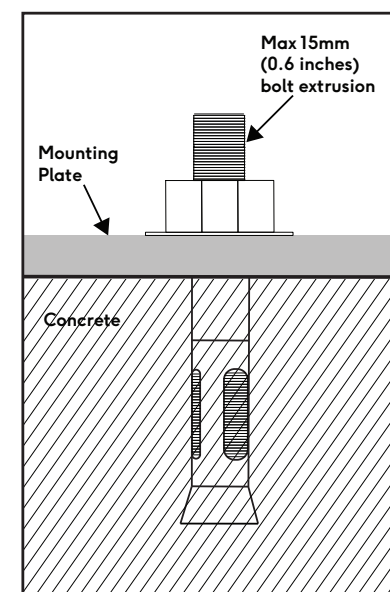


Fig 5/ Silver Bullet Fixing

Cradle Clearance Map.

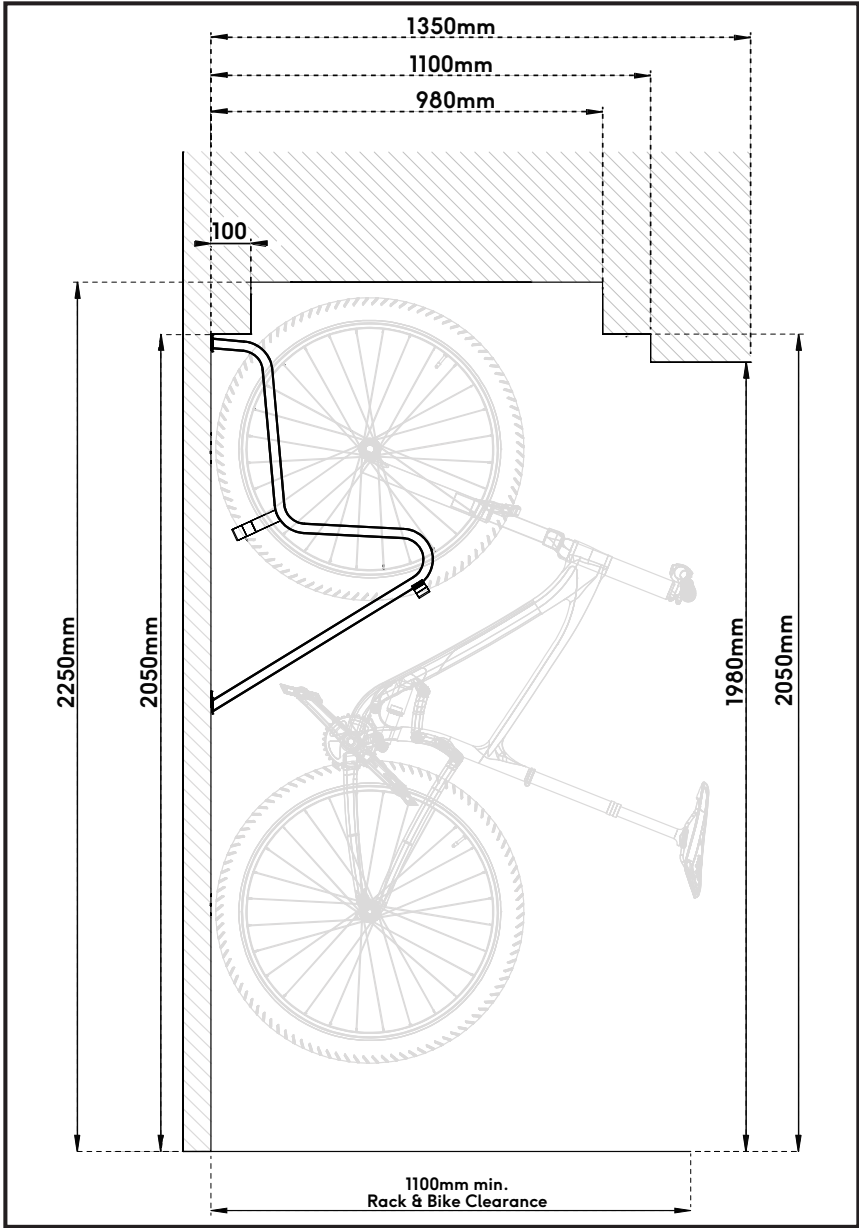

Cradle Clearance Map - Path Of Travel

Five At Heart



Creating
spaces
for however
you Roll...

fiveatheart.com

Australia

UK/Europe

North America

1300 769 332 or au_info@fiveatheart.com

+44 (0) 020 3137 1966 or eu_info@fiveatheart.com

(+1) 888 218 3433 or na_info@fiveatheart.com

