

Halo

Official Patent and Design Numbers (either pending or granted)
Australian design no. 201915826 | Great Britain design no. D925247 | United States design no. 6086265



Spec Sheet

Five
At
Heart

Brightens up any room.



**Five
At
Heart**

Halo.



Product Performance

The Halo provides optimised bike parking parallel to the wall, allowing one bike to be stored above another.

The flat shelf which supports the wheels accommodates any standard bike, as it does not rely on the frame of the bike for support.

The hoop shape supports D-locks, allowing users to secure both wheels and the frame for safe parking.


Materials

40mm plywood shelf


Stainless steel hoops

Mild steel wall mounting bracket with powder coated satin black finish.


TOP VIEW

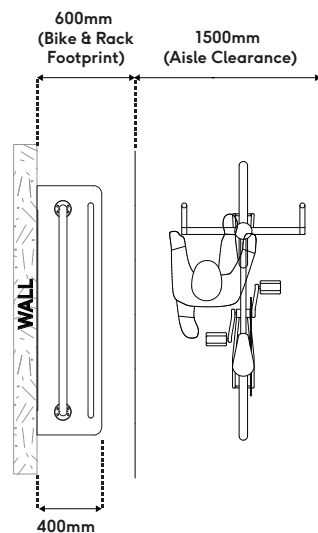

SIDE VIEW

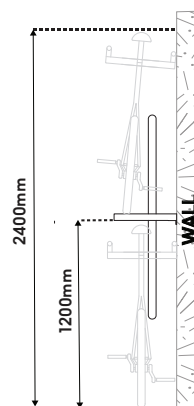

FRONT VIEW

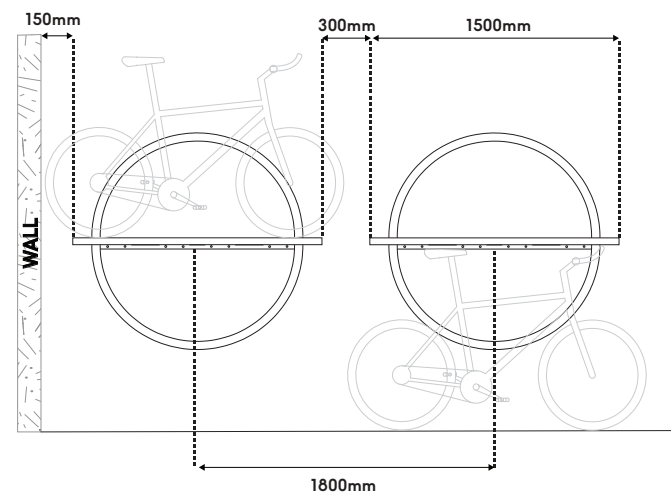

Halo Warranty and Technical Data

Warranty Information

Five At Heart's Halo comes with a standard 5 year warranty, effective from the handover date.

For the warranty period, we warrant that the equipment (and any materials) we supply will comply with the relevant standards at the date of installation.

This warranty is limited and may be excluded in part or in full in light of user damage or failure to install to Five At Heart specification.

We recommend a monthly visual inspection for signs of damage or need for cleaning.

Contact Five At Heart in the event of product damage.

Disclaimer

Images may differ from actual product and specifications may change without prior notice.

Product is manufactured to metric dimensions.

Fixing options / and details

Fig 1 Into Concrete Wall – M10/50mm (1 15/16") zinc plated sleeve anchor

Fig 2 Into Masonry Block work – Buglescrew and ram plug

Fig 3 Dimensions for Mounting Halo on wall

Product weight

40 kg

Substrate requirements

- Concrete – 100mm (3 15/16") thick and in good condition
- Masonry Block

Maintenance Requirements

If any moving parts appear to be malfunctioning, discontinue use and contact Five At Heart.

Cleaning

Cleaning should start at the time the products are installed, ensuring that construction materials such as concrete, plaster and paint splashes are removed before they have a chance to dry. Failure to remove these materials will require aggressive cleaning in the future, that may be harmful to the products.

Wipe with a damp cloth for surface cleaning. Regular cleaning may be done with a solution of warm water and a non-abrasive, pH neutral detergent solution. Surfaces should be thoroughly rinsed after cleaning to remove all residues.

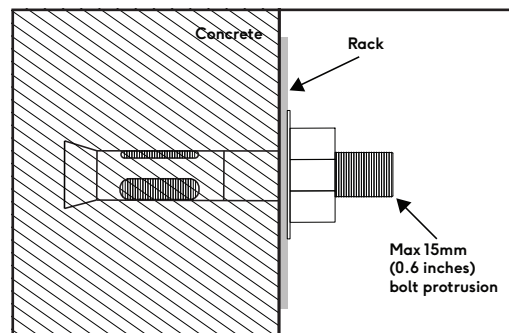


Fig 1 Concrete Wall

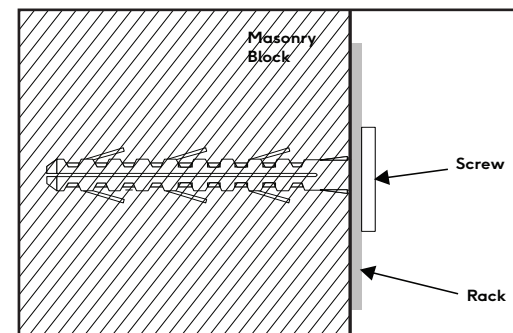


Fig 2 Masonry Block

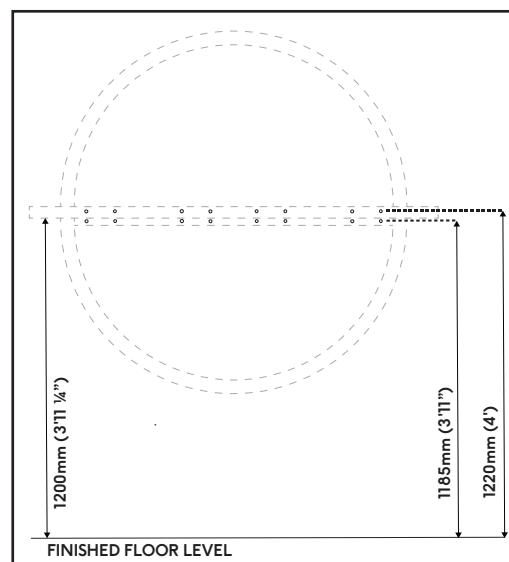


Fig 3 Mounting Heights

WARNING: DO NOT UNDER ANY CIRCUMSTANCES USE STRONG SOLVENTS SUCH AS THINNERS OR SOLUTIONS CONTAINING CHLORINATED HYDROCARBONS, ESTERS OR KETONES. ABRASIVE CLEANERS OR CUTTING COMPOUNDS SHOULD NOT BE USED.

Five At Heart



Creating
spaces
for however
you Roll...



fiveatheart.com

Australia

UK/Europe

North America

(+61) 1300 769 332 or au_info@fiveatheart.com

+44 (0)20 3137 1966 or eu_info@fiveatheart.com

(+1) 888 218 3433 or na_info@fiveatheart.com