

The Maxidora.



Spec Sheet



Official Patent and Design Numbers (either pending or granted)
Australian patent no. 2025904184

**Generous hanging height
and built-in secured shoe
storage, with a hinged
bench seat that opens up
more space than ever.**



**Five
At
Heart**

The Maxidora.

Product Performance

876mm hanging height ensures garments have enough space to hang properly.

A full-width hanging rail allows multiple garments to hang comfortably.

Hinged bench seat provides unrestricted full-height access to the lower locker when unlocked.

Each compartment includes integrated shoe storage for secure in-locker placement, without reducing garment hanging height.

A small, easily accessible personal shelf keeps wallets, phones, and keys within quick reach.

Coat hook on the back of the locker door provides additional hanging space.

Material

Laminex TrueScale Woodgrains bench top

Laminated MDF door (AUS: E0 MR)
(with extensive colour range)

White particleboard carcass (AUS: E1 MR)

Moisture resistant base with black finish

Specification

(Z) Locker Width : 300 or 400mm

(Y) Locker Depth : 500 or 600mm

(X) Locker Clearance: 800 or 900mm

Bench Depth : 300mm


Front Door Vents (Optional)

Choice of locking system


Bulkheads available at additional cost




TOP VIEW

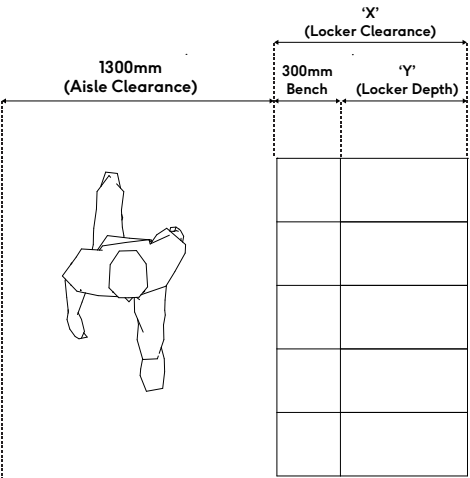

SIDE VIEW

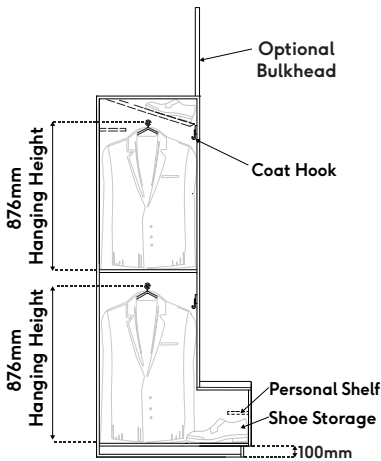

FRONT VIEW

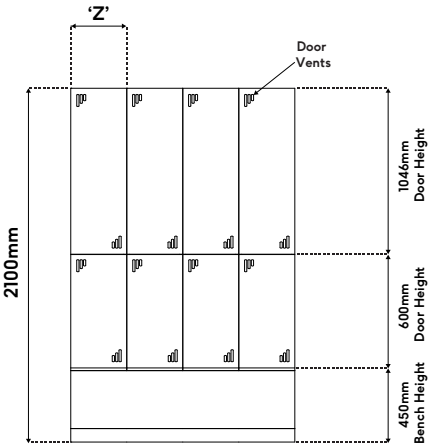

Maxidora (3 Tier).

Product Performance

Only the bottom locker compartment can retain dedicated hanging space and shoe storage, along with all the standard features of the Maxidora.

The top locker is now split into two smaller box lockers, which are **not** for hanging garments but can be used for bags and smaller belongings.

While this option is great for increasing locker capacity, the primary purpose of lockers within changing rooms is to hang and store garments. For this reason, we recommend that a minimum of 85% of lockers within changing rooms provide garment hanging.

Material

Laminex TrueScale Woodgrains bench top

Laminated MDF door (AUS: E0 MR)
(with extensive colour range)

White particleboard carcass (AUS: E1 MR)

Moisture resistant base with black finish

Specification

(Z) Locker Width : 300 or 400mm

(Y) Locker Depth : 500 or 600mm

(X) Locker Clearance: 800 or 900mm

Bench Depth : 300mm


Front Door Vents (Optional)

Choice of locking system


Bulkheads available at additional cost




TOP VIEW

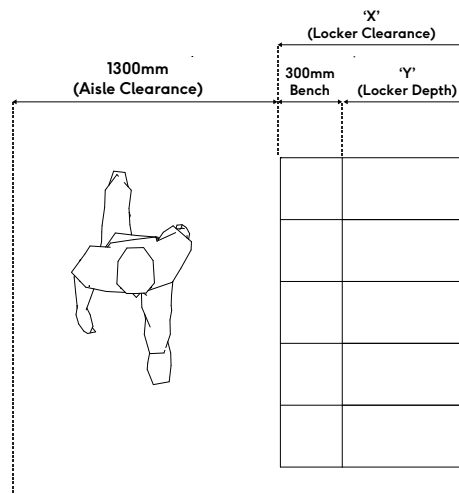

SIDE VIEW

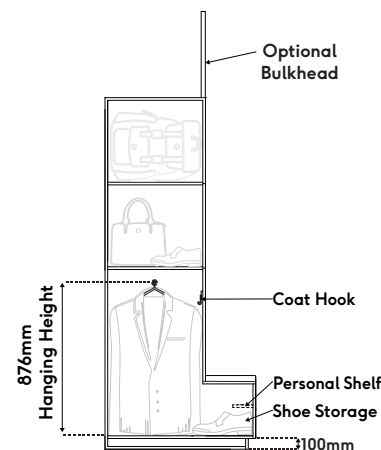

FRONT VIEW

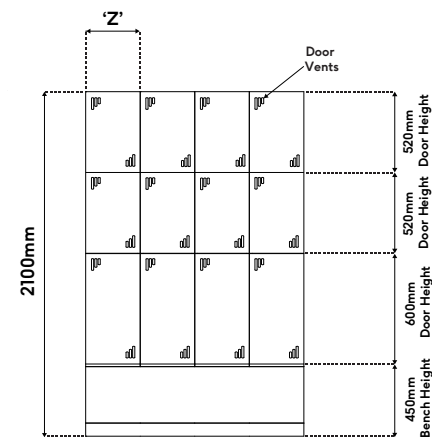

Maxidora Warranty and Technical Data

Warranty Information

Five At Heart's Maxidora comes with a standard 7 year warranty, effective from the handover date.

For the warranty period, we warrant that the equipment (and any materials) we supply will comply with the relevant standards at the date of installation.

This warranty is limited and may be excluded in part or in full in light of user damage or failure to install to Five At Heart specification.

We recommend a monthly visual inspection for signs of damage or need for cleaning.

Contact Five At Heart in the event of product damage.

Disclaimer

Images may differ from actual product and specifications may change without prior notice.

Manufactured to metric dimensions.

Installation Requirements

AUS: Lockers/auxiliary units require a minimum of 16mm at the end of each nib wall for filler panels and 50mm for corner fillers.

UK/Europe: Lockers/auxiliary units require a minimum of 25mm at the end of each nib wall for filler panels and 50mm for corner fillers.

Fig 1 Bench seat corner extension provides the cleanest appearance and best user experience, with no filler panel required for the hinged bench seat and increased space around the corner lockers.

Fig 2 This configuration still provides a great user experience with plenty of space and access to the corner lockers. Bench seat filler panels required for corner units depending on broader locker layout (see figure 4).

Fig 3 This configuration maximises locker capacity; Although **one lower corner locker loses shoe storage**. Bench seat filler panels required for corner units (see figure 4).

Fig 4 Filler panel for hinged bench seats on **end** locker units where an adjacent locker or wall restricts the opening of the lower locker door. The filler panel provides the necessary clearance for the hinged bench seat to open fully.

Maintenance Requirements

If any moving parts appear to be malfunctioning, discontinue use and contact Five At Heart.

Cleaning

For general care and maintenance, simply wipe away most spills or marks with a damp cloth, or wipe clean with non abrasive household cleaner. Do not submerge product at any point. Avoid scourers and abrasives as they will damage the surface. Do not use waxes or polishing products as they dull the natural shine.

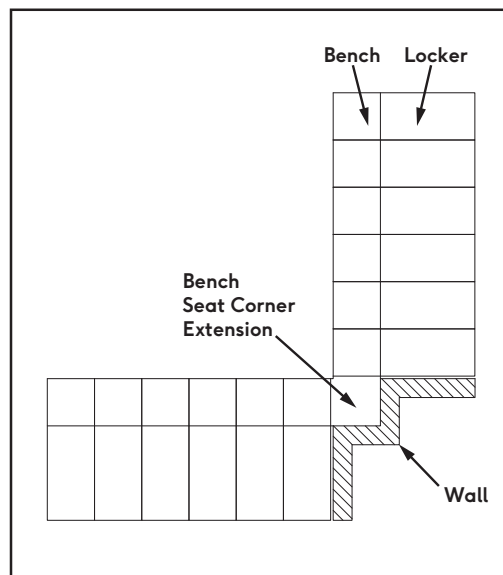


Fig 1 Corner Configuration Option 1

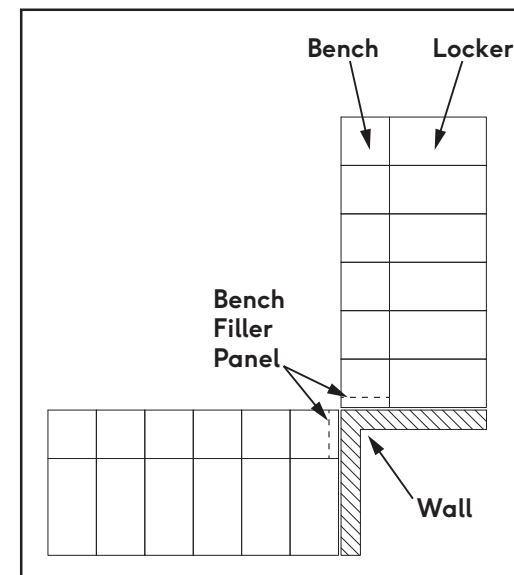


Fig 2 Corner Configuration Option 2

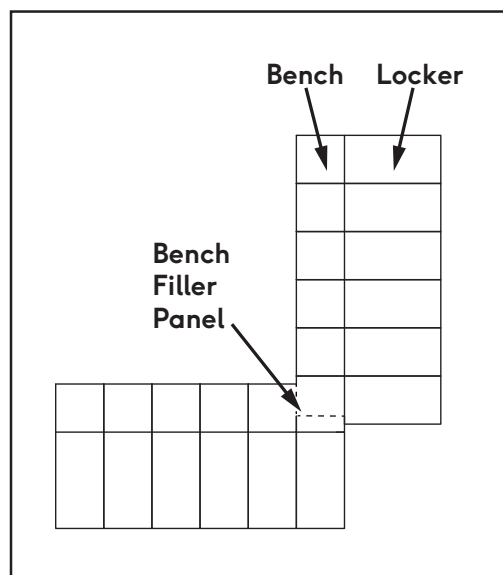


Fig 3 Corner Configuration Option 3

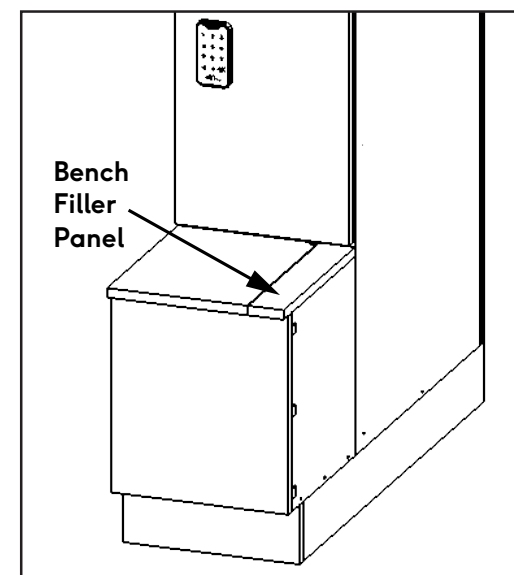


Fig 4 End of Row/Corner Hinged Bench Seat

Five At Heart



Creating
spaces
for however
you Roll...

fiveatheart.com

Australia
UK/Europe

1300 769 332 or au_info@fiveatheart.com
+44 (0) 020 3137 1966 or eu_info@fiveatheart.com

