

Charge-O Shine-O.

Locally
Made



Spec Sheet

Five
At
Heart

No more wasted space with this combination of utility and luxury.



**Five
At
Heart**

Charge-O Shine-O.



Product Performance

30 phone charging compartments

Heute Elégance Couleur shoe shiner

We recommend each compartment to have one power point with two USB outlets. Power points are **not** included.

Electrical connection by others

Material

Laminated MDF door (AUS: E0 MR)
(with extensive colour range)


White particleboard carcass (AUS: E1 MR)

Moisture resistant base with black finish


Specifications

Bulkheads available at additional cost


TOP VIEW

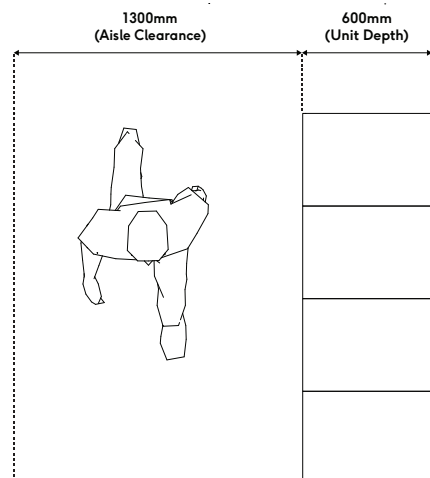

SIDE VIEW

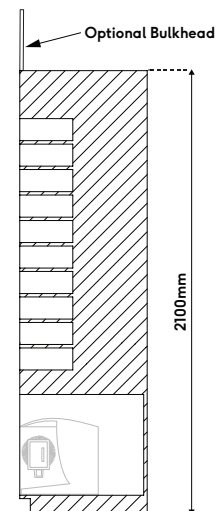

FRONT VIEW

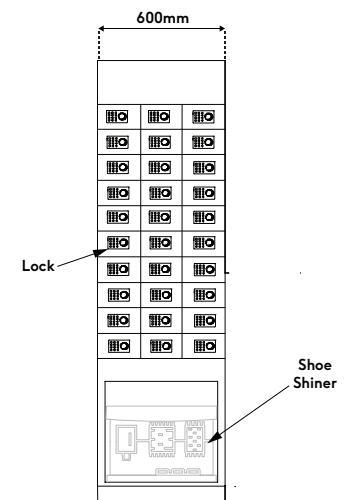

Charge-O Shine-O Warranty & Technical Data

Warranty Information

Five At Heart's Charge-O Shine-O comes with a standard 7 year warranty, effective from the handover date. Shoe Shiner subject to Huete manufacturers warranty.

For the warranty period, we warrant that the equipment (and any materials) we supply will comply with the relevant standards at the date of installation. This warranty is limited and may be excluded in part or in full in light of user damage or failure to install to Five At Heart specification.

We recommend a monthly visual inspection for signs of damage or need for cleaning.

Contact Five At Heart in the event of product damage.

Disclaimer

Images may differ from actual product and specifications may change without prior notice.

Manufactured to metric dimensions.

Technical Data

Huete Elégance Couleur shoe shiner has a steel structure coated in graphite (RAL 7022) it features a built in foot sensor and self timer, as well as including a horsehair pre-cleaning brush, 2 Polishing brushes and Polish dispenser. **(Fig 1)**

Standard AC power supply required for power points and shoe shiner. Cut outs in joinery included **(Power points not included)**. An electrician will need to install and wire on site. **(done by others)** See **Fig. 2** for the cut out locations for power points, subject to site conditions, surrounding joinery units and filler panels.

Installation Requirements

AUS: Lockers/auxiliary units require a minimum of 16mm at the end of each nib wall for filler panels and 50mm for corner fillers.

UK/Europe: Lockers/auxiliary units require a minimum of 25mm at the end of each nib wall for filler panels and 50mm for corner fillers.

Maintenance Requirements

If any moving parts appear to be malfunctioning, discontinue use and contact Five At Heart.

Cleaning

For general care and maintenance, simply wipe away most spills or marks with a damp cloth, or wipe clean with non abrasive household cleaner.

Do not submerge product at any point.

Avoid scourers and abrasives as they will damage the surface.

Do not use waxes or polishing products as they dull the natural shine.



Fig 1 Huete Elégance Couleur shoe shiner

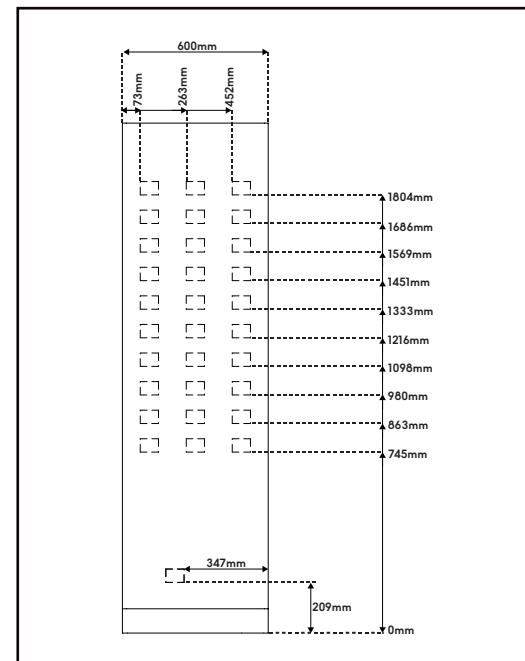


Fig 2 Power point cut out locations.

Five At Heart



Creating
spaces
for however
you Roll...



fiveatheart.com

Australia
UK/Europe

1300 769 332 or au_info@fiveatheart.com
+44 (0) 020 3137 1966 or eu_info@fiveatheart.com